

# film capacitors

## metallized film

### 2222 344 (nugget)

Coupling and decoupling capacitors of well-defined shape with radial leads. For use in general industrial and professional applications where environmental conditions are of prime importance.

Rated capacitance range, $C_R$	3,9 nF to 5,8 $\mu$ F
tolerance	10 and 20%
Capacitance series	E6 (E12 on request)
Rated voltage range, $U_R$ (d.c.)	100 to 630 V
$U_R$ (a.c.) 50–60 Hz	63 to 220 V
Category temperature range	–55 to +100 °C
Test voltage	$1,6 \times U_R$
Insulation resistance	
$C \leq 0,33 \mu$ F; $U_R \geq 250$ V(d.c.)	$R > 30000$ M $\Omega$
$U_R = 100$ V(d.c.)	$R > 15000$ M $\Omega$
$C > 0,33 \mu$ F; $U_R \geq 250$ V(d.c.)	$RC > 10000$ s
$U_R = 100$ V(d.c.)	$RC > 5000$ s
Tan $\delta$ at 10 kHz	
dielectric: polycarbonate	$\leq 75 \times 10^{-4}$
PETP	$\leq 150 \times 10^{-4}$
Climatic category IEC 68	55/100/56

Max steepness in V/ $\mu$ s (pulse loads)  
dimensions L (mm)


V(d.c.)	13	17,5	26	30
100	10	7	3,5	3
250	20	10	6	5
400	30	20	9	8
630	45	30	13	10

#### Selection chart for $C_R$ – $U_R$ and relevant sizes


$C_R$ $\mu$ F	cap. code	$U_R$ (V)																
		d.c. 100			250			400			630							
		a.c. 63	T	x L	x H	160	T	x L	x H	200	T	x L	x H	220	T	x L	x H	
0,01	103																	
0,015	153																	
0,022	223																	
0,033	333																	
0,047	473																	
0,068	683																	
0,1	104	4,5 x 13	x 10															
0,15	154	4,5 x 13	x 10															
0,22	224	5 x 13	x 11															
0,33	334	5 x 17,5	x 11															
0,47	474	6 x 17,5	x 11,5															
0,68	684	7 x 17,5	x 13															
1	105	8,5 x 17,5	x 14,5															
1,5	155	6,5 x 26	x 15,5															
2,2	225	8,5 x 26	x 18															
3,3	335	9,5 x 26	x 19															
4,7	475	11 x 30	x 20,5															
6,8	685	13,5 x 30	x 23															

#### Composition of the catalogue no.

		2222 344			
dielectric	V(d.c.)	%			
polycarbonate	100	20	20	capacitance	
			10	21	code
			20	44	in table
		250	20	45	
			10	50	
			10	51	
PETP	400	20	60		
			10	61	
	630	20	60		
			10	61	
	100	20	24		
			10	25	
	250	20	40		
			10	41	
	400	20	54		
			10	55	

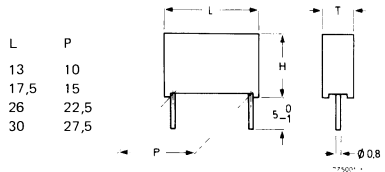

**2222 344 (nugget)  
miniature**

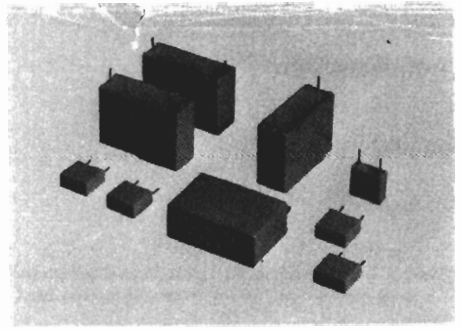


See previous page except for

version	max pulse steepness V/ $\mu$ s
100	10
250	25
400	40
630	60

Composition of the catalogue no.

			2222 344	
dielectric	V(d.c.)	%	26	capacitance code in table
PETP	100	20	26	capacitance code in table
		10	27	
	250	20	46	
		10	47	
	400	20	56	
		10	57	
	630	20	66	
		10	67	



fixed volume for ALL types  
T x L x H = 4,5 x 10,5 x 10 mm  
P = 7,5 mm

