
# Ferrule Type, Fast-Acting Fuses

### BAN

## For 13/32" x 1-1/2" (10.3mm x 38.1mm)





Catalog Symbol: BAN

13/32" x 1-1/2" (10.3mm x 38.1mm) 5AG

Ferrule Type, Fast-Acting

1-30A 250Vac

Body Material: FIBRE TUBE Ferrule Material: BRONZE Ferrule Plating: NICKEL

**Interrupting Ratings: Military Tested** 

35A (1.1 - 3.5A) 100A (3.6 - 10A) 200A (10.1 - 15A) 750A (15.1 - 30A)


· Fibre; formerly 5AB.

· Mounts in Buss BM series fuseblocks.

#### **Electrical Ratings (Catalog Symbol and Amperes)**

250Vac				
BAN-1	BAN-5	BAN-10	BAN-25	
BAN-2	BAN-6	BAN-12	BAN-30	
BAN-3	BAN-7	BAN-15	_	
BAN-4	BAN-8	BAN-20	_	

# Time-Current Characteristic Curves-Average Melt (Full Size Curves Available) AMPERE

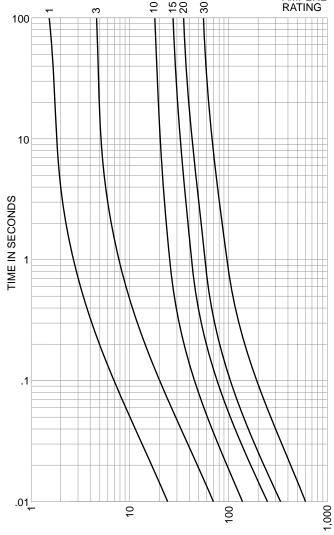

RMS SYMMETRICAL CURRENT IN AMPERES

#### **Carton Quantity and Weight**

		5		
Ampere	Carton Qty	Weig	jht*	
Ratings		Lbs.	Kg.	
1-30	100	1.4	635	

\*Weight per carton.

C€ CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks 1104, 2104
- Finger-safe fuseholders 1109, 1102, 1103, 1151
- Panel-mount fuseholders 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

