

List No: D.F.826/V.
for $1\frac{1}{4}'' \times \frac{1}{4}'' \varnothing$ Fuses
U.K. Patent Number 930330
U.S.A. Patent No. 1,132,224

S.P. Neon Fuse-Holder D.F.826
"It glows when it Blows"
This unique model has a neon in front lens-cover. On mains (100/125V or 200/250V), "Neon glows" if Fuse blows saving time and money. **Patented.** Users find it invaluable. (Also to quantity order, models to stay alight until fuse is blown).



List No. F.315,
or $1\frac{1}{4}'' \times \frac{1}{4}'' \varnothing$ Fuses
List No. F.316,
for $1'' \times \frac{1}{4}'' \varnothing$ Fuses

Heavy-Duty Fuse Holders F.315, F.316 and F.316/S.


All moulded body with screw in front cover and tags accepting 187 series push-on connectors which we can supply, if requested. Generous current ratings at 13A. 250V. A.C./D.C. and 20A. at 32V. ~ and inherently safe design **F.316/S** identical to **F.316** but with an extra shallow fuse retaining cap, which can only be removed with the aid of a screwdriver or coin, thus conferring extra safety. For $\frac{1}{4}'' \varnothing$ Fuse links, lengths as captioned. Fuse links, lengths as captioned. Max. working temperature 120°C. (ambient + internal heating). Withstanding 5KV proof. test.



List No: F.316/S
for $1'' \times \frac{1}{4}'' \varnothing$ Fuses

Flush Fitting Holders F.317 and F.318.

A moulded Fuseholder, 250V. 5 Amp rating, intrinsically safe design, slotted front cap avoids accidental removal of fuse link. Flush fitting with minimum panel projection. Tags accepting 187 series Push-On-Tabs.

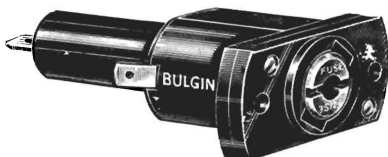

List No: F.317 for $1'' \times \frac{1}{4}'' \varnothing$ Fuses
List No: F.318 for $1\frac{1}{4}'' \times \frac{1}{4}'' \varnothing$ Fuses
Patent No. 1,159,999

Standard S.P. Panel-Fix Holders F.55, 155, 156.

3 popular types of panel mounting fuse-holder **F 55** has metal and S.R.B.P. body with screw-in front cover. **F.155-156** have all moulded body, and front-cover fixes by bayonet action.