


Time-Delay Ferrule Fuses

MWO

1/4" x 1 1/4"



Dimensional Data

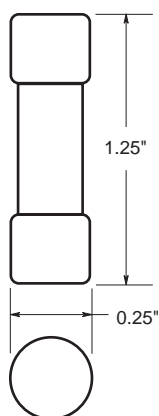


Catalog Symbol: MWO
 Time-Delay
 Interrupting Rating: 10,000A
 Voltage Rating: 125V
 Agency Approvals:
 U.L. Listed, Guide JDYX, File E19180
 CSA Certified, Class 1422-01, File 53787

Electrical Ratings (Catalog Symbol and Amperes)

MWO-12
MWO-15

Time-Current Characteristic Curves—Average Melt

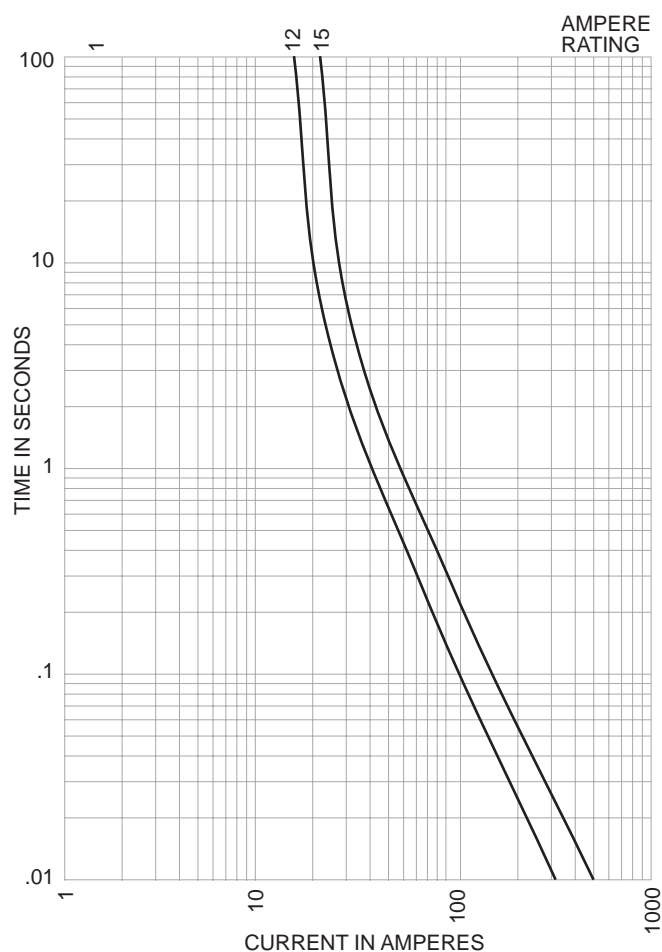

General Information:

- The MWO is specifically designed for demanding applications in which severe ON-OFF cycling operation is anticipated such as in the case when the fuse is used for protection of microwave oven circuits.
- Glass Tube.
- Nickel Plated Brass Endcaps.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.