



Your Power Safeguard™
您的电路安全卫士



TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL(cUL)		UR/cUR		CSA	
		H	L	L1	H	L	
61NM,62NM-0100H/L	100mA	●	●	●	●	●	0.00194
61NM,62NM-0125H/L	125mA	●	●	●	●	●	0.00373
61NM,62NM-0150H/L	150mA	●	●	●	●	●	0.00685
61NM,62NM-0160H/L	160mA	●	●	●	●	●	0.00782
61NM,62NM-0200H/L	200mA	●	●	●	●	●	0.00655
61NM,62NM-0250H/L	250mA	●	●	●	●	●	0.0123
61NM,62NM-0300H/L	300mA	●	●	●	●	●	0.0215
61NM,62NM-0315H/L	315mA	●	●	●	●	●	0.0239
61NM,62NM-0350H/L	350mA	●	●	●	●	●	0.0384
61NM,62NM-0400H/L	400mA	●	●	●	●	●	0.0515
61NM,62NM-0500H/L	500mA	●	●	●	●	●	0.112
61NM,62NM-0600H/L	600mA	●	●	●	●	●	0.213
61NM,62NM-0630H/L	630mA	●	●	●	●	●	0.239
61NM,62NM-0750H/L	750mA	●	●	●	●	●	0.399
61NM,62NM-0800H/L	800mA	●	●	●	●	●	0.504
61NM,62NM-010H/L	1A	●	●	●	●	●	0.968
61NM,62NM-012H/L	1.2A	●	●	●	●	●	1.751
61NM,62NM-013H/L	1.25A	●	●	●	●	●	1.788
61NM,62NM-015H/L	1.5A	●	●	●	●	●	3.565
61NM,62NM-016H/L	1.6A	●	●	●	●	●	4.026
61NM,62NM-020H/L	2A	●	●	●	●	●	8.57
61NM,62NM-025H/L	2.5A	●	●	●	●	●	14.21
61NM,62NM-030H/L	3A	●	●	●	●	●	23.12
61NM,62NM-032H/L	3.15A	●	●	●	●	●	25.70
61NM,62NM-035H/L	3.5A	●	●	●	●	●	32.15
61NM,62NM-040H/L	4A	●	●	●	●	●	43.65
61NM,62NM-050H/L	5A	●	●	●	●	●	72.54
61NM,62NM-060H/L	6A	●	●	●	●	●	120.2
61NM,62NM-063H/L	6.3A	●	●	●	●	●	168.7
61NM,62NM-070H/L	7A	●	●	●	●	●	195.3
61NM,62NM-080H/L	8A	●	●	●	●	●	393.0
61NM,62NM-090H/L	9A	●	●	●	●	●	476.5
61NM,62NM-100H/L	10A	●	●	●	●	●	556.9
61NM,62NM-120H/L/L1	12A	●	●	●	●	●	805.9
61NM,62NM-150H/L/L1	15A	●	●	●	●	●	1868
61NM,62NM-160H/L/L1	16A	●	●	●	●	●	2196
61NM,62NM-200H/L/L1	20A	●	●	●	●	●	3212
61NM,62NM-250H/L/L1	25A	●	●	●	●	●	5902
61NM,62NM-300H/L/L1	30A	●	●	●	●	●	8494

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V (H代表 250V), L DENOTES FOR 125V (L代表 125V)
L1 DENOTES FOR 32V (L1代表 32V)

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	5 seconds Max.	最慢 5 秒

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s




Φ 6.35x32mm, RoHS Compliant & Pb-Free
GLASS TUBE FUSE (FAST BLOW)
玻璃保险丝管 (速断型)

INTERRUPTING CAPACITY / 分断能力:

- 10,000 amperes at 125V AC (32mA-10A)
- 35 amperes at 250V AC (32mA-1A)
- 100 amperes at 250V AC (1.2A-3.5A)
- 200 amperes at 250V AC (4A-10A)
- 100 amperes at 125V AC (1A-30A) PSE (61NM)
- 500 amperes at 125V AC (1A-15A) PSE (62NM)
- 100 amperes at 125V AC (16A-30A) PSE (62NM)
- 100 amperes at 250V AC (1A-30A) PSE (61NM/62NM)
- 100 amperes at 250V AC (100mA-10A) KC
- 300 amperes at 32V AC/DC (12A-30A) UR/cUR

Dimensions/ 尺寸:

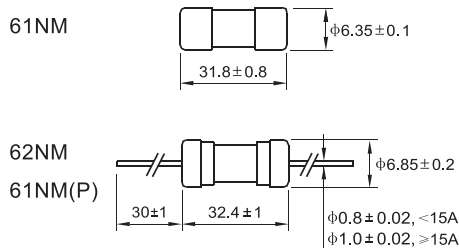

61NM/62NM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

61NM/62NM 平均 I-T 曲线图 (仅供参考)

